



## A New Never Before Available Fire Protection System For Military & Civilian Government Deployment


### MAX-SUPPRESS™

2.6-GAL (10-LITER)  
• MODEL: MMS-2

3.96-GAL (15-LITER)  
• MODEL: MMS-4

NSN #:

CAGE CODE:

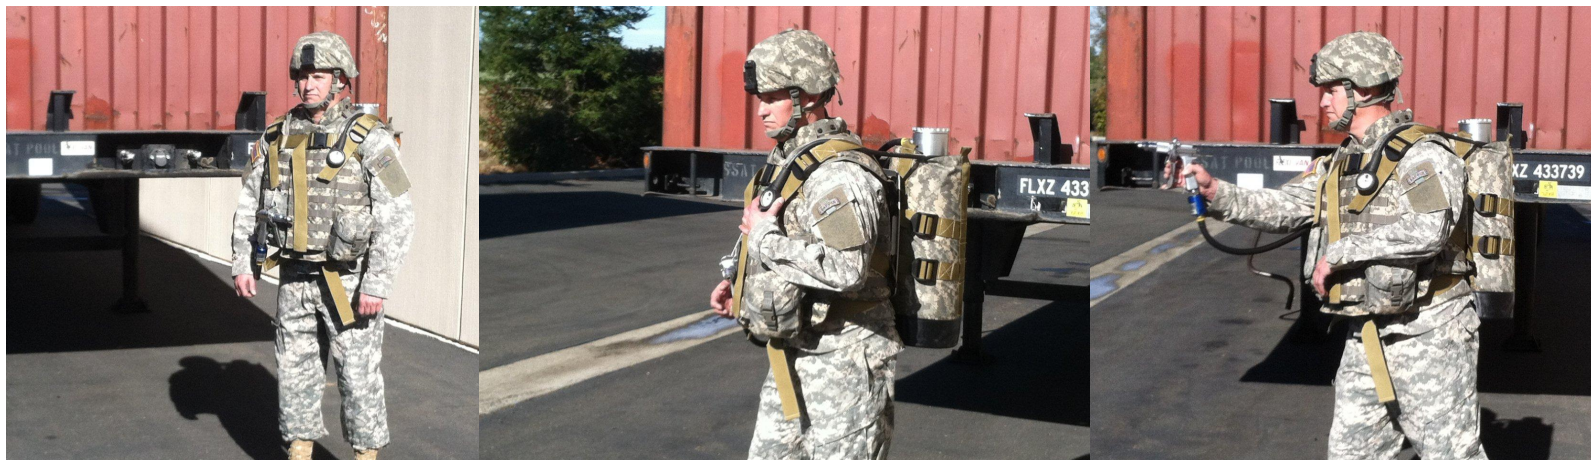

| DESCRIPTION                                                                                                                                                                       | SPECIFICATIONS                                                                                                                                                                                         | ADVANTAGES                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Stainless steel construction for durability<br>Light weight backpack designed for ease in deployment<br>Handheld pistol grip stainless steel nozzle gun for ease and accurate use | Tank OP: >165-psi (11.37-Bars)<br>Test Pressure: 600-psi (41.3-Bars)<br>Burst Pressure: 2300-psi (158.5-Bars)<br>Foam Discharge Distance: Approx. 40 to 60-ft (Approx.: 12 to 18-m) per wind condition | <i>The FFCs require no special labeling or chronic health hazard warning statements and comply with FHSA regulations, 16 CFR 1500 and California Proposition 65.</i> |
| Recommended Liquid Agent:<br>FireStopper® PFE-FR FFC • All Fire Class Effective: ABCDK Tested & Rated under UL711, ULC, NFPA10, EN3-7                                             | Air Cylinder (SCUBA) Recharge Time: 2-4 min<br>Foam Discharge Distance: Approx.: 40 to 60-ft (Approx.: 12 to 18-m) depending on wind conditions                                                        | <i>Compatible with all other wet and dry chemicals; Effective on marine fires and will adhere to surfaces such as fiberglass, etc.</i>                               |
| Subclass Effective Agent: • Alcohols • Esters • Ethers • Carbon Composites • Rubber • Plastics • Lithium, Sodium Metals, Nuclear Spent Rods, etc.                                 | Agent Temp. Resistant: -100° F (-73°C)<br>Operating Temperature: -59.8° F (-51° C)<br>Approx. Empty Weight (10-Liter): 15-lbs (5.44-kg)<br>Charged: 35-lbs (16-kg)                                     | No re-ignition • Non-Irritant (skin or eyes) • Non-Toxic, Non-Aggressive • No Clean-up (Bio-Degradable)                                                              |
| Designed to fire twice allow for quick refill in the field to provide superior fire killing capacity over any other portable system.                                              | Approx. Empty Weight 15-Liter: 22 lbs. (12.2 Kg.)<br>Charged: 45-lbs (20.4-kg)                                                                                                                         | Limited Warranty: 20-year Onshore & 10-Year for Offshore Use                                                                                                         |



# FIRESTOPPER®

“Bringing Firefighting Into The 21st Century”<sup>SM</sup>